


ZVS PREMIUM BLE CHARGER



**NE Link App:
PUTTING THE POWER
OF CHARGING
IN THE PALM
OF YOUR HAND.**

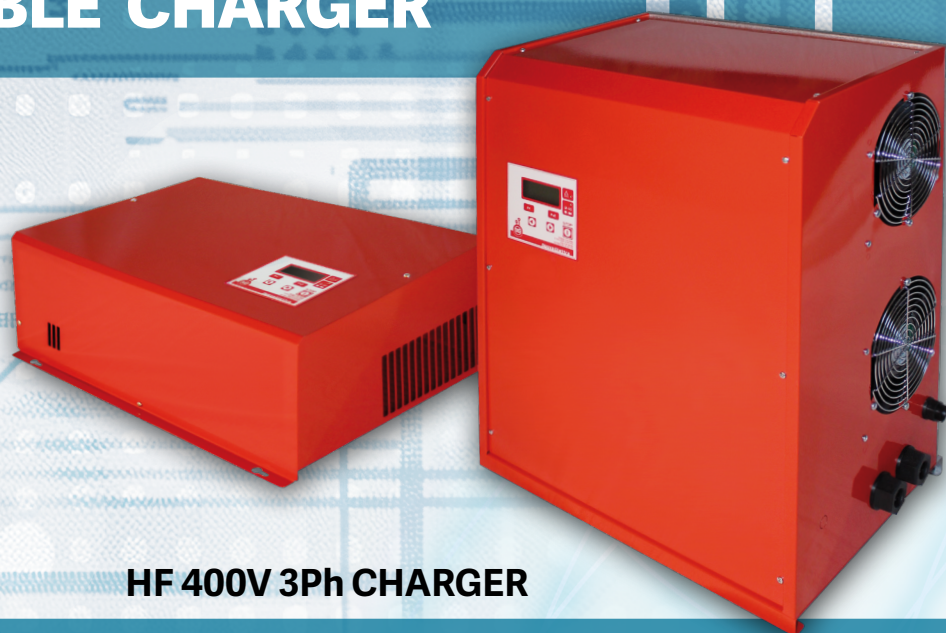

HF 400V 3Ph CHARGER

Whether you're team Android or Apple, NE LINK supports both platforms. Download now for free and enrich your user experience.

→ **Experience the Freedom**

→ **Easy Data Management**

→ **Real-Time Insights**

→ **Enhance Analysis**

→ **Remote Convenience**

→ **Share the Power**

- **Long-Range Bluetooth Connection:** Connect with your charger from a distance, giving you the freedom to manage your charging stations with ease.
- **Monitor Everything:** real-time monitoring of current, voltage, energy, and power parameters-keeping you informed at all times.
- **Quick Data Access:** Our full-archive data download feature ensures you get the information you need, when you need it.
- **Data Visualization:** easy-to-understand graphs and statistics, allowing you to make informed decisions.
- **PDF Reports:** Generate comprehensive PDF reports for a detailed analysis of your charging patterns.
- **Parameters on the Go:** Adjust charger parameters remotely, offering unparalleled convenience and control.
- **Firmware Updates:** Keep your charger up-to-date with remote firmware updates, ensuring optimal performance at all times.
- Share your charging data across multiple devices.

**Experience the future of charging management with NE LINK.
Download now and charge smarter!**

Download on the
App Store

GET IT ON
Google Play





FREE DOWNLOAD



Nuova Elettra

TECHNICAL SPECIFICATIONS



DIMENSIONS A
W x D x H (mm)
476 x 290 x 202

DIMENSIONS B
W x D x H (mm)
531 x 396 x 202

DIMENSIONS C
W x D x H (mm)
508 x 323 x 595

DIMENSIONS D
W x D x H (mm)
627 x 323 x 927

WEIGHT A
14 kg
(ZVSP version 15 kg)

WEIGHT B
20.5 kg
(ZVSP version 21.5 kg)

WEIGHT C
40 kg
(ZVSP version 41 kg)

WEIGHT D
71,5 kg
(ZVSP version 72,5 kg)

TYPE	I [A] 360VAC	I [A] 400VAC	Max power [kW]	AC Fuse [A]	AC Plug	DC cables [mm ²] lenght 2,5 m	Cabinet Size
ZVS 24 - 60	3,2	2,9	2	10	CEE 16A 400V 3~	25	A
ZVS 24 - 80	4,2	3,8	2,7	10	CEE 16A 400V 3~	25	A
ZVS 24 - 100	5,3	4,8	3,3	10	CEE 16A 400V 3~	25	A
ZVS 24 - 120	6,3	5,8	4	10	CEE 16A 400V 3~	35	B
ZVS 24 - 140	7,5	6,8	4,7	10	CEE 16A 400V 3~	35	C
ZVS 24 - 200	10,7	9,7	6,7	16	CEE 16A 400V 3~	70	C
ZVS 24 - 240	12,7	11,5	8	16	CEE 16A 400V 3~	95	C
ZVS 24 - 300	15,9	14,4	10	16	CEE 16A 400V 3~	95	D
ZVS 24 - 360	19	17,3	12	25	CEE 32A 400V 3~	95	D
ZVS 48 - 60	6,3	5,8	4	10	CEE 16A 400V 3~	25	B
ZVS 48 - 80	8,4	7,7	5,3	10	CEE 16A 400V 3~	25	B
ZVS 48 - 100	10,6	9,6	6,7	16	CEE 16A 400V 3~	25	B
ZVS 48 - 120	12,7	11,5	8	16	CEE 16A 400V 3~	35	B
ZVS 48 - 140	15	13,6	9,4	16	CEE 16A 400V 3~	35	C
ZVS 48 - 200	21,2	19,3	13,4	25	CEE 32A 400V 3~	70	C
ZVS 48 - 240	25,4	23,1	16	32	CEE 32A 400V 3~	95	C
ZVS 48 - 300	31,7	28,8	20	32	CEE 32A 400V 3~	95	D
ZVS 48 - 360	38,1	34,6	24	50	CEE 63A 400V 3~	95	D
ZVS 80 - 60	10,6	9,6	6,7	16	CEE 16A 400V 3~	25	B
ZVS 80 - 80	14,1	12,8	8,9	16	CEE 16A 400V 3~	25	B
ZVS 80 - 100	17,8	16,0	11,1	25	CEE 16A 400V 3~	25	B
ZVS 80 - 120	21,3	19,4	13,5	25	CEE 32A 400V 3~	35	B
ZVS 80 - 140	24,7	22,5	15,6	25	CEE 32A 400V 3~	35	C
ZVS 80 - 200	35,3	32,0	22,2	50	CEE 32A 400V 3~	70	C
ZVS 80 - 240	42,4	38,5	26,6	50	CEE 63A 400V 3~	95	C
ZVS 80 - 300	53	48,1	33,3	63	CEE 63A 400V 3~	95	D
ZVS 80 - 360	63,5	57,7	40	63	CEE 63A 400V 3~	95	D
ZVS 96 - 100	21,1	19,2	13,3	25	CEE 32A 400V 3~	25	B
ZVS 96 - 200	42,4	38,5	26,6	50	CEE 63A 400V 3~	70	C
ZVS 96 - 300	63,5	57,7	40	63	CEE 63A 400V 3~	95	D
ZVS 120 - 80	21,1	19,2	13,3	25	CEE 32A 400V 3~	25	B
ZVS 120 - 160	42,4	38,5	26,6	50	CEE 63A 400V 3~	50	C
ZVS 120 - 240	63,5	57,7	40	63	CEE 63A 400V 3~	95	D

ALSO AVAILABLE AS 36V AND 72V



ZVS PREMIUM BLE CHARGER

FEATURES	ZVS PREMIUM
Battery/charger voltage mismatch discrimination	✓
Deep discharge warning	✓
Random delay start after connection	✓
Time-of-Day Start feature	✓
Multi-ampere-hour capability	✓
Assign specific battery capacity (Ah)	✓
User selectable output curves (Pb/gel)	✓
Safety timer	✓
Thermal cut-out	✓
Programmable Equalising Charge	✓
Delay Equalising	✓
Maintenance charge	✓
Final current programming feature	✓
Max power programming feature	✓
Precharge stage	✓
Adjustable gassing point	✓
Extra length charging cable	✓
Adjustable charge factor	✓
Battery disconnect shutdown	✓
Weekly schedule	✓
LCD Display	✓
Multi Language display	✓
Display with adjustable brightness	✓
Charge cycle review	✓
Error Display Indication	✓
Instantaneous AC power absorption (kW)	✓
Input Kilowatt hour feature (kWh)	✓
Energy meter with total counter and archive function	✓
LED's indication of charge status	✓
Scheduled maintenance management	✓
AC fail recovery protection	✓
Restore factory setting	✓
Password Protection	✓
Archive Function (2500 Cycles)	✓
Bluetooth interface	✓
Test mode	✓
Battery regeneration mode	✓
Battery Temperature Compensation (opt)	✓
Display Battery Temperature (opt)	✓
Safe Disconnect - Anti Arcing (opt)	✓
Automatic Refill Control (opt)	✓
Cool Battery Detector (opt)	✓
External Lamp (opt)	✓



nuovaElettra

carica batterie _ apparecchiature elettroniche industriali



Certificato numero 15152
ISO 9001, ISO 14001

Nuova Elettra s.r.l. _ I-46029 Suzzara MN _ via Galvani, 2a (Z.A. Rangavino)
tel +39 0376 539011 _ fax +39 0376 532916 _ info@nuovaelettra.it _ www.nuovaelettra.it